

Carrier

The Air Authority

SLIM

Floor Standing Air Conditioner




ENERGENIUS
INVERTER TECHNOLOGY

Available in

2.5 HP

3.0 HP

4.0 HP

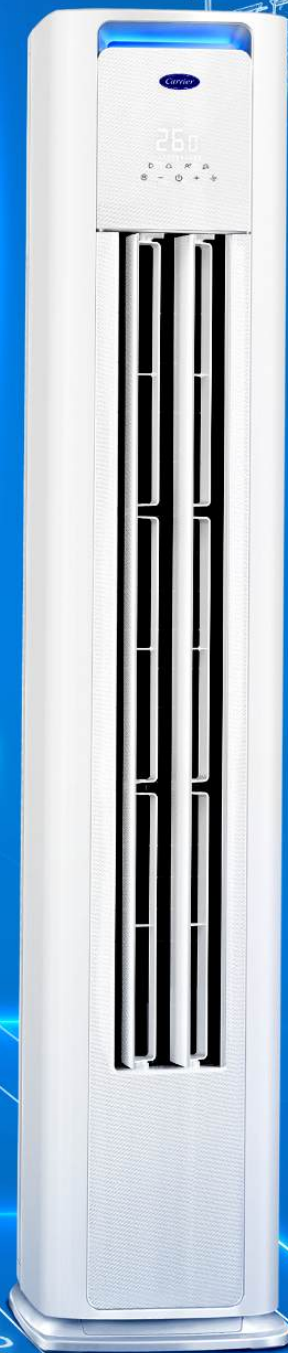

1.80m

0.36m


0.38m

AIR CONDITIONING REDEFINED

Quick, quiet, cost-efficient cooling at its sleekest.

AIRCONDITIONING REDEFINED

Reinvent any experience with Carrier Slim's energy-efficient cooling system. Its 3D airflow distribution creates a refreshing atmosphere without direct drafts, ensuring every moment is enjoyed in perfect comfort

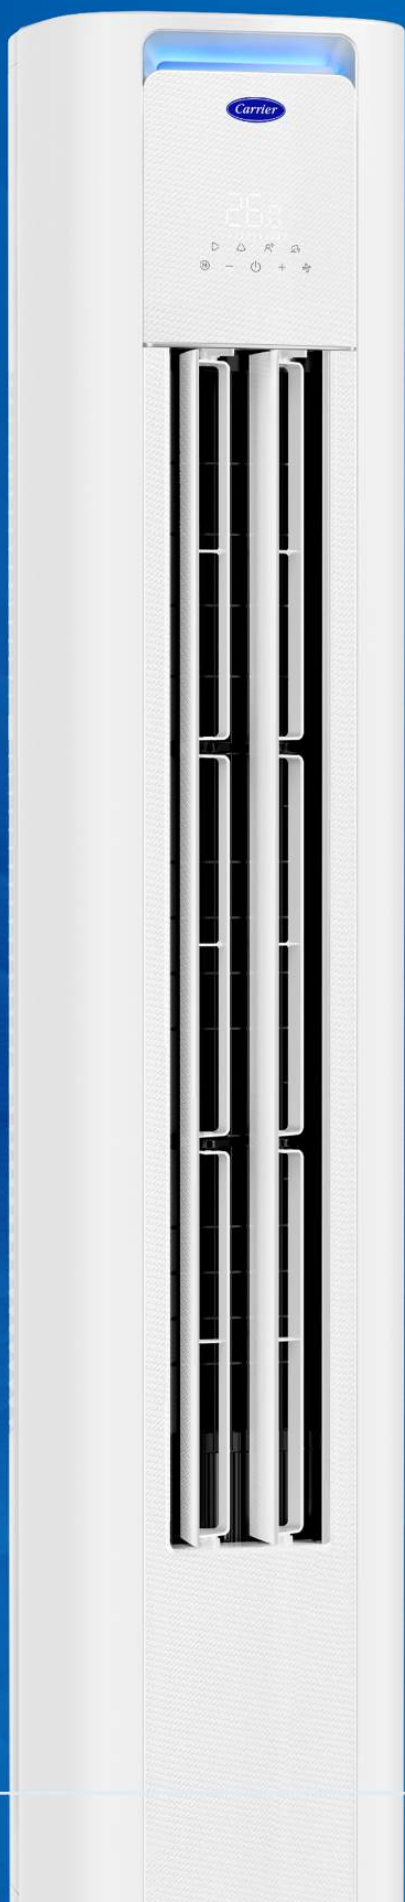

MODERN & SLEEK DESIGN, MINIMAL FOOTPRINT

Instantly upgrade interiors and optimize every space with Carrier Slim - the smallest footprint in its class.



SUPERIOR ENERGY EFFICIENCY

Enjoy cooling comfort with minimal impact on your bottom line. Carrier Slim has the highest CSPF rating in the category and a 5-Star Energy Rating.

*Cost-to-Run / Hour:

P7.25 (2.5HP) • P8.45 (3.0HP) • P9.60 (4.0HP)



QUIET LIKE A WHISPER AT 35 dB

Carrier Slim delivers powerful cooling at an ultra-quiet 35 dB, allowing you to stay focused, relax, or enjoy conversations without disruption.



QUICK, EVEN COOLING

With Carrier Slim's Breeze Away function, everyone can experience the unique 3D airflow distribution that evenly cools and envelops the room.



ACTIVE IONIZER FOR CLEAN AIR

Enjoy cleaner, cooler air using Ion Cloud technology that eliminates bacteria and allergens, providing a healthier dining environment.



TOOL-FREE MAINTENANCE

Carrier Slim's tool-free filters make it easier to clean. Plus, get reliable support with nationwide service and parts availability.



BUILT TO ENDURE

Protect the unit against rust and corrosion with a premium Gold Fin Anti-Corrosion Coating, ensuring long-lasting performance even with the Philippines' demanding climate.

*Computed with the DOE CSPF Calculator using Meralco rate of P14.35/kWh (May 2026). Actual cost may vary.

Consistent, quiet cooling for
a comfortable experience



Design that complements
the modern retail space

Technical Specifications

SLIM FLOOR STANDING AIR CONDITIONER			NEW 2.5HP	NEW 3.0HP	4.0HP
Set Code			53CLV024308	53CLV030308	53CLV036308
Indoor Unit Code			42CLV024308	42CLV030308	42CLV036308
Outdoor Unit Code			38CLV024308	38CLV030308	38CLV036308
Suggested Room Size			up to 48 sqm	up to 60 sqm	up to 69 sqm
Power Supply			230V , 1 Ph, 60 hz	230V , 1 Ph, 60 hz	230V , 1 Ph, 60 hz
Cooling (Standard Conditions)	Capacity	kJ/hr	25,300 (6,900 - 27,600)	31,600 (8, 800 - 32,900)	36,400 (7,200 - 39,000)
		kW	7.03 (1.92 - 7.67)	8.78 (2.44 - 9.14)	10.10 (2.00 - 10.80)
	Power Input	W	2,260 (390 - 2,600)	2,660 (470 - 3,060)	3,400 (350 - 3,850)
	Current	A	9.9 (2.8 - 11.4)	11.7 (3.3 - 13.4)	15.1 (2.8 - 17.0)
	CSPF	-	6.00	6.15	6.15
	Star Rating	-	3	4	5
Safety (Based on IEC60335-2- 40)	Rated Power Input	W	2,900	3,750	5,000
	Rated Current	A	13.5	17.5	22.0
Compressor	Type	-	Rotary Inverter	Rotary Inverter	Rotary Inverter
Indoor fan motor	Type	-	BLDC	BLDC	BLDC
	Air Flow (H/M/L)	m³/h	1400/1040/900	1400/1040/900	1500/1150/1000
Indoor Noise Level (Hi/Mi/Lo/SI)		dB(A)	46/43/41/34	46/43/41/34	49/44/41/35
Indoor Unit	Dimension (W*D*H)	mm	380*392*1,802	380*392*1,802	380*392*1,802
	Packing (W*D*H)	mm	2,040*490*475	2,040*490*475	2,040*490*475
	Stacking Height	-	5	5	5
	Net/Gross Weight	kg	25.7 / 33.4	25.7 / 33.4	25.7 / 33.4
Outdoor fan motor	Type	-	BLDC	BLDC	BLDC
Outdoor Noise Level		dB(A)	60	60	61
Outdoor Unit	Dimension (W*D*H)	mm	805*330*554	890*342*673	946*420*810
	Packing (W*D*H)	mm	915*370*615	995*398*740	1,090*500*885
	Stacking Height	-	4	3	2
	Net/Gross Weight	kg	28.0 / 30.5	38.3 / 41.3	51.9 / 56.0
Refrigerant/Charge		kg	R32 / 0.73	R32 / 0.90	R32 / 1.40
Refrigerant piping	Standard pipe length	m	5	5	5
	Maximum pipe length	m	25	30	35
	Additional refrigerant	g/m	12	12	12
	Max difference in level	m	20	20	20
	Liquid side	mm(in)	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)
	Gas side	mm(in)	12.7 (1/2)	12.7 (1/2)	12.7 (1/2)

Enjoy 1-year warranty on parts and service and 5 years on the compressor

Notes:

- Capacity rating is based on the following standard conditions:
Indoor Condition: 27°C DB / 19°C WB
Outdoor Condition: 35°C DB / 24°C WB
- Airflow is measured in dry conditions.
- Product information and specifications in the brochure have been obtained under specific testing conditions and are applicable to the data publication only.
- Product information and specifications are subject to change without notice due to continuous product development and improvement.
- Concepcion Carrier Air Conditioning Company (CCAC) does not warrant the accuracy of all product information and specifications contained herein.
- CCAC shall not be liable for any claim of error, or misrepresentation in relation to the information and specifications contained herein, or for any loss or damage resulting from reliance on such information or specification.



Customer Care Hotline
#8863 5555

Website
cares.carrier.com.ph

Socials
Carrier Philippines

VISIT OUR WEBSITE

